



**EIBENSTOCK**  
Elektrowerkzeuge

**100** 1919  
JAHRE 2019



**PROFESSIONAL**  
**GERMAN** SINCE 1919  
**POWER TOOLS**



**PATENTED**

**Innovative  
drive solution**



**one motor – two contra  
rotating tools for  
optimal mixing results**

**MOBILE MIXING STATION**

**TwinMix 1800 T**



### The mobile stations for thorough mixing up to 50 kg

**USE:**

Homogenous and lump free mixing of numerous materials with different viscosity

**Especially convenient for the mixing of self-levelling floor levelling compounds, plaster, thin-bed mortar, fillers**

Building construction and civil engineering, landscaping, floor renovators, tilers



**OPTIMAL MIXING RESULTS:**

Mixing paddle with scraper and fast running inner rod – avoids material deposits on the bucket rim

Two electronic speed levels – start mixing function with reduced speed

Soft start, constant speed, high torque



**Tipper with 4 wheels, 2 steerable** (accessory) – especially designed for clean and precise pouring of self-levelling filler and levelling compounds



**Transport carriage with 2 big wheels** (supplied) – flexible and mobile at the job site



**Timer for setting the requested mixing time for special requirements of the material manufacturer (accessory)**

Specifications	TwinMix 1800 T (prepared for timer function)
Power input	1800 W
Rated voltage	230 V ~
Rated speed mixing rod	250/450 rpm
Rated speed mixing paddle	20/36 rpm
Bucket size	65 l
Spindle connection	M 14/Special
Weight	70.0 kg
<b>Order no.</b>	<b>07623000</b>
Supplied on a pallet incl. mixing rod, mixing paddle, bucket 65 l and transport carriage	



# EIBENSTOCK

## Elektrowerkzeuge

**PROFESSIONAL**  
**GERMAN** SINCE 1919  
**POWER TOOLS**

### Versatile application possibilities – best mixing results



masonry mortar



thin-bed mortar



plaster



floating screed



tile cement



two-component materials



insulation board adhesive



screed



filler

### Fast, uninterrupted work when using several mixing carriages, f. e. for levelling filler



saves at least  
**50% time**

- ☞ saves time and costs
- ☞ reduces the risk that the material is setting too fast in wet-on-wet cycle

10:15



10:20







### Reduction of hazardous dusts



Connection for dust exhaust Ø 35 mm as well as funnel tube with brushes – dust reduced filling and mixing of the materials

- ☞ dust reduced construction site
- ☞ cleanliness in the interior

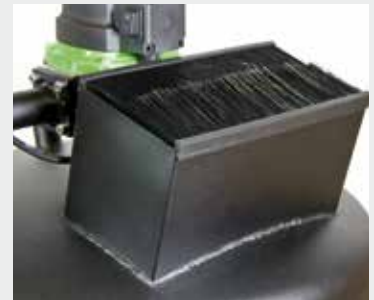

Accessories	Order no.
Timer for TwinMix 1800 T	32352000
Mixing paddle	31451000
Scraper for mixing paddle (3 pieces)	32351000
Universal stirring rod	31452000
Transport carriage	09Z11000
Tipper	09Z12000
Bucket 65l	32341000

Your distributor: